SUSPENDED CEILING CLOUDS

SPEC DATA SHEET **SQ-116**

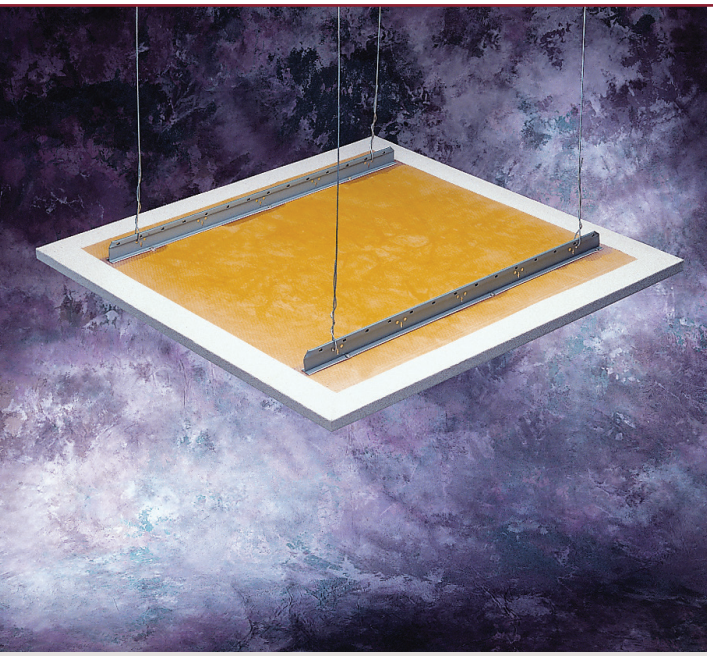

- Excellent acoustical performance
- High-quality, economical, multi-purpose panels
- Class A fire rated
- Standard, designer or C.O.M. fabrics
- Various mounting options
- Custom sizes and shapes

All Noise Control, LLC
2731 Vista Parkway Suite # D-8
WPB, Florida 33411

561-964-9360 (tel)
561-964-9359 (fax)
info@allnoisecontrol.com
www.allnoisecontrol.com

SUSPENDED CEILING CLOUDS

Ceiling Clouds are perfect for the reduction of sound in ceiling areas. They are suspended horizontally with D-Rings (for panels up to 4'x4') or T-grid attachment for larger panels.

Ceiling Clouds are constructed with a 6-7# PCF rigid fiberglass absorber core. The edges are available in natural or chemically hardened and are available in 4 edge profiles.

FINISHES

Guilford of Maine FR701 Style 2100 is the industry standard. Hundreds of approved decorative fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Design Tex and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

ACOUSTICAL NRC

Rating

1/2" Thick 1"	.50–.60
Thick 2" Thick	.80 – .90
	1.05 – 1.25

SIZING

All panels are custom made with sizing up to a maximum 4'x10' and with thickness ranging from 1/2"–4' thick.

MOUNTING OPTIONS

D-Rings, T-Grids or Rotofast Cloud Anchors

EDGE DETAILS



Square Miter Bevel Radius

SPECIFICATIONS Specifications can be downloaded from our website www.allnoisecontrol.com or call us at 561-964-9360