ANC-3100 HIGH- IMPACT

SPEC DATA SHEET SQ-102



- · High-impact, abuse-resistant
- Excellent acoustical performance
- · Class A fire rated
- · Standard, designer or C.O.M fabric
- · Various mounting options
- · Custom sizes and shapes

ANC-3100 HIGH-IMPACT

ACOUSTICAL WALL & CEILING PANELS

Acoustical Wall and Ceiling Panels by All Noise Control are designed to solve your acoustical needs while enhancing the aesthetic look of your space. With a variety of options to choose from including sizes, shapes, fabrics and colors it is easy to create the perfect solution for your reverberation sound problems.

The ANC-3100 High-Impact Wall Panels are ideal for environments that combine the need for superior acoustical performance and resilience to high traffic areas. ANC-3100 High-Impact Panels are constructed using a 6-7# rigid fiberglass absorber core laminated to 16#-20# PCF high-impact fiberglass.

The ANC-3100 High-Impact Wall Panels are available in four standard thicknesses: 5/8", 1-1/8", 1-5/8" and 2-1/8". The S-2100 High-Impact Wall Panels are available with 4 different edge profiles and are available in standard or custom-sizes (up to a maximum of 4' X10') with custom, designer or C.O.M fabric available.

Applications:

- · Schools / Universities
- . Auditoriums
- · Houses of worship
- Office spaces






ANC-3100 HIGH-IMPACT

ACOUSTICAL WALL & CEILING PANELS

SPEC DATA SHEET **SQ-102**

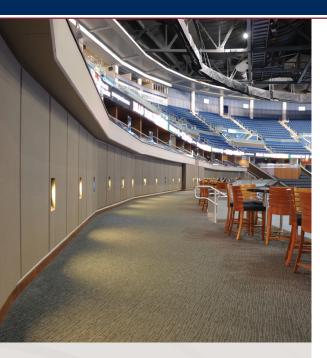

All Noise Control, LLC

2731 Vista Parkway

WPB, Florida 33411

561-964-9360 (tel) 561-964-9359 (fax)

info@allnoisecontrol.com

Suite # D-8

FINISHES

Guilford of Maine FR701 Style 2100 is the industry standard. Hundreds of approved decorative fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Design Tex and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

ACOUSTICAL

NRC Rating

5/8" Thick ———	.50 – .60
1-1/8" Thick ———	.80 – .90
2-1/8" Thick ———	90 - 100

SIZING

All panels are custom made with standard sizes up to 4' \times 10', with thickness ranging from 5/8" \times 2-1/8".

SPECIFICATIONS

Specifications can be downloaded from our website www.soundseal.com or call us at 1.800.569.1294

MOUNTING OPTIONS



2-Part Mechanical Clips




Rotofast Anchors




Impaling Clip

EDGE DETAILS









e Miter

Radius