


SPEC DATA SHEET SQ-115

# ANC-4010 & ANC-4010B ACOUSTICAL CEILING TILES

CEILING TILES

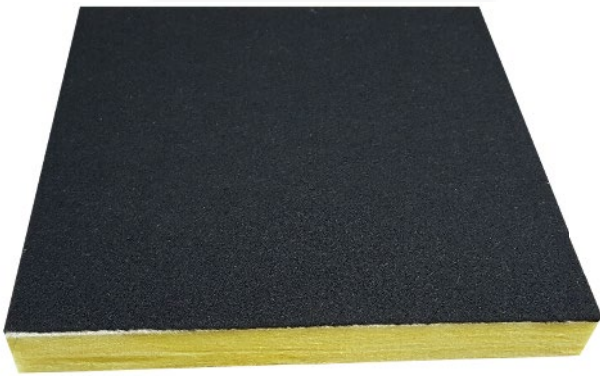

Substrate: 6-7# PCF rigid fiberglass core  
\*C-400B adds a vinyl noise barrier

Mounting: Grid supplied by others

Facing: White or Black Poly Vinyl

Edge Detail: Square

Finish: Black matte facing

Acoustical NRC Rating:

1" Thick	.85
2" Thick	1.15
C-400B Version	STC 26

Weights: C-400 Tile .6 lbs / SqFt  
C-400B Tile 1.6 lbs / SqFt

Fire Rating: All components have a Class A fire rating  
per ASTM E-84

Other Specifications:

Specifications can be downloaded from our website  
[www.soundseal.com](http://www.soundseal.com) or call us at 1.800.569.1294

ANC-Ceiling tiles are offered as both a sound absorbing as well as a combination sound absorbing / sound blocking tile.

ANC-4010 Ceiling Tiles have a black matte facing attached to a 1" or 2" thick rigid fiberglass board and have excellent sound absorption (NRC) ratings.

ANC-4010B Ceiling Tiles take the standard C-400 tile and add a 1# per square foot foil backed vinyl noise to the backside of the tile for high sound absorption (NRC) and high sound blocking (STC) requirements.

- Standard size 2' x 2' or 2' x 4'
- Custom sizes available
- 1" or 2" thickness
- Black matte facing
- Excellent acoustical values
- Offered with a vinyl noise barrier for high STC requirements