


FILL SOLID WITH SOUND DEADENING
MATERIAL
(REFER TO PIB #160).

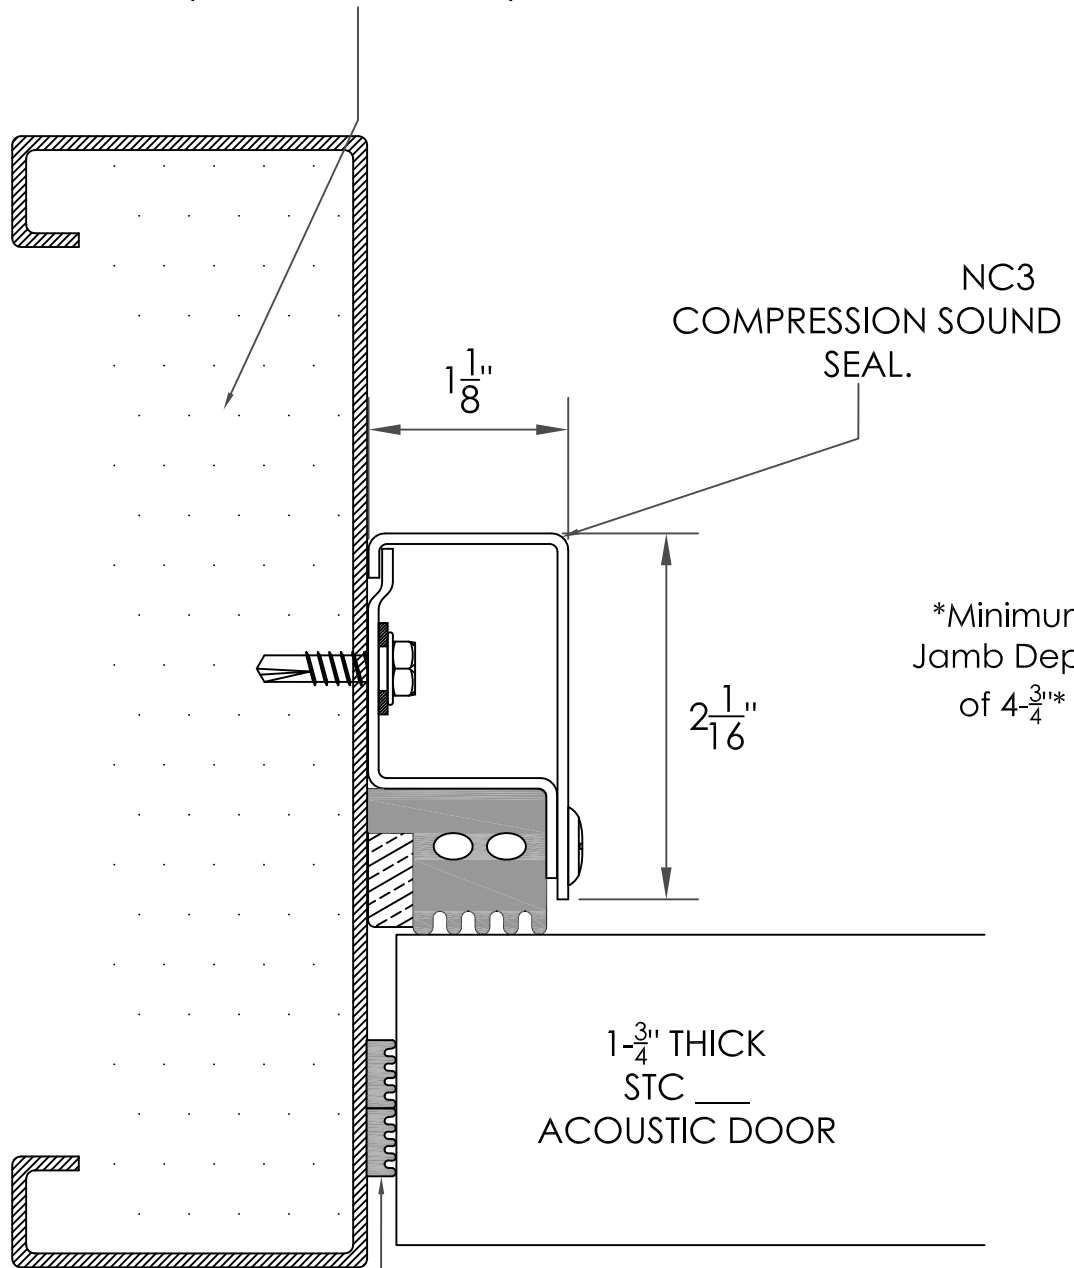

NC3
COMPRESSION SOUND
SEAL.

*Minimum
Jamb Depth
of 4-³/₄"*

1-³/₄" THICK
STC ____
ACOUSTIC DOOR

1076 NEOPRENE SEAL APPLIED
AFTER FINISH PAINT BETWEEN
DOOR & FRAME.

JAMB OPENING DIMS: