



2731 Vista Parkway #8
WPB, Florida 33411

Ph. (561) 964-9360
info@allnoisecontrol.com

Acoustical Floor Underlayments

Acoustical Underlayment for Linoleum, VCT, Sheet Vinyl & Vinyl Plank Flooring

Jumpax is a free floating, dry levelling, sound reducing, time and money saving fast track underlay system. Jumpax is capable of creating a super smooth joint less surface for direct glue down of resilient floor coverings such as linoleum, sheet vinyl, VCT, LVT, vinyl plank, cork floors and PSA backed carpets. Jumpax underlay is suitable for commercial and residential use. The dual underlayment system consists of a composed based board and a calibrated top board and is the best underlay system in terms of levelling and impact sound reduction.

Jumpax systems have been installed in universities, hospitals, condominiums, apartments, hotels and resorts and commercial places all over the world. In addition, it has been installed in commercial and public buildings to prevent high-traffic passages on the floors above from intruding conference, office and meeting areas.

Jumpax can easily be installed over concrete, gypsum topping or APA plywood on existing floors, new construction or renovations.

Product Specification:

Total thickness	10 mm / 3/8"
Board Size	23 5/8" x 47 1/4"
Boards per package	4 ea top & bottom
Quantity per package	31 sq ft
Weight - sq ft	1.35 lbs per sq ft
Weight per package	42 lbs

Acoustics performance on back page


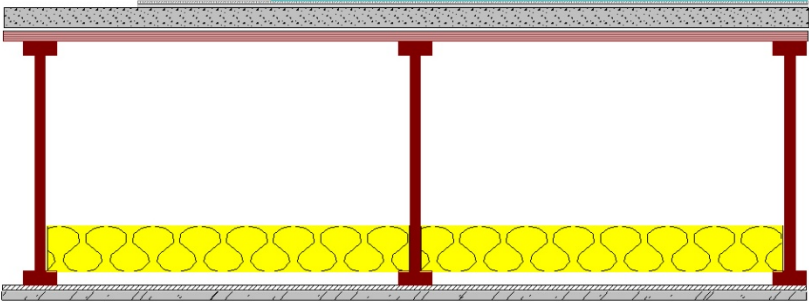
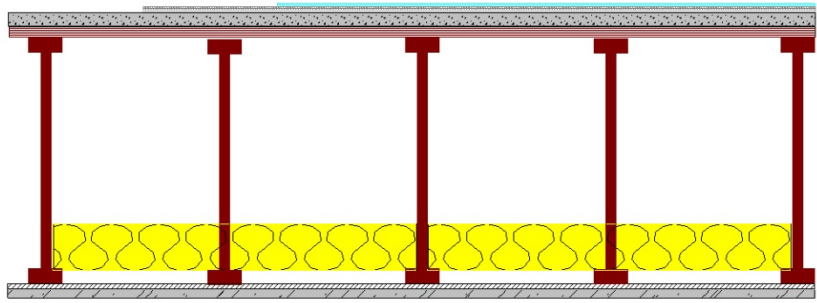



Advantage of Using Jumpax

- Fast Track Floor Prep saves time and money on floor preparation
- Outstanding Floor Leveling up to 1/8" over 3ft up to 1/4" over 10 foot span
- Sound Reducing Qualities ideal for universities, hospitals, condominiums, apartments, hotels, resorts and commercial places
- Super Smooth Surface for joint less direct glue down of resilient floor coverings



Jumpax Acoustical Testing

Description	Detail	IIC / FIIC Rating
<p>Jumpax</p> <p>Glue down vinyl over 10mm Jumpax over 6" slab</p>		<p>Δ 25 / IIC 53</p>
<p>Jumpax</p> <p>Glue down vinyl over 10mm Jumpax over 1 ½" gypsum topping over 5/8" plywood- 16" TJI – 24 centers RC1 channel – 1 layer 5/8 GWB</p>		<p>IIC 54</p>
<p>Jumpax</p> <p>Glue down vinyl over 10mm Jumpax over 1" gypsum topping over 5/8" plywood - 16" TJI – 16 centers RC1 channel – 1 layer 5/8 GWB</p>		<p>FIIC 57</p>
<p>Jumpax</p> <p>Glue down vinyl over 10mm Jumpax over 8" slab</p>		<p>FIIC 61</p>

For more information on Jumpax Underlayment systems including installation instructions, installation videos, accessories and technical data please go online at www.soundproofingfloorsusa.com or call us 561-964-9360