



CEILING CLOUDS

Ceiling Clouds are perfect for the reduction of sound in ceiling areas. They are suspended horizontally with D-Rings (for panels up to 4'x4') or T-grid attachment for larger panels.

Ceiling Clouds are constructed with a 6-7# PCF rigid fiberglass absorber core. The edges are available in natural or chemically hardened and are available in 4 edge profiles.

FINISHES

Guilford of Maine FR701 Style 2100 is the industry standard. Hundreds of approved decorative fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Design Tex and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

ACOUSTICAL

NRC Rating		
1/2" Thick	_____	.50 – .60
1" Thick	_____	.80 – .90
2" Thick	_____	1.05 – 1.25


SIZING

All panels are custom made with sizing up to a maximum 4'x10' and with thickness ranging from 1/2"–4' thick.

MOUNTING OPTIONS

D-Rings, T-Grids or Rotofast Cloud Anchors

EDGE DETAILS

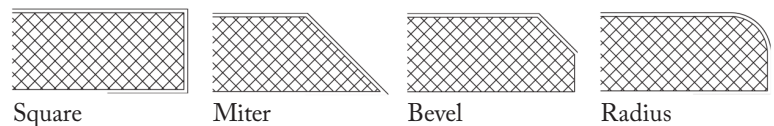

- Excellent acoustical performance
- High-quality, economical, multi-purpose panels
- Class A fire rated
- Standard, designer or C.O.M. fabrics
- Various mounting options
- Custom sizes and shapes

2731 Vista Parkway D-8
 West Palm Beach, FL 33411
 www.allnoisecontrol.com
 Email: sales@allnoisecontrol.com
 Tel: (561) 964-9360