561-964-9360



BASS TRAP

The Bass Trap[™] kit consists of two 24" x 48" panels that effectively absorb sound energy from 75Hz and up. Designed to be corner mounted at ear-height, or stacked floor to ceiling, the kit provides substantial surface area for broadband absorption with effective coverage down into the low bass region.

The Bass Trap kit is constructed from fabric wrapped, high-density glass wool Broadway panels. When installed in the room corner, a 17" deep air space is formed behind the panel. This air space provides significant absorption in the problematic low-mid (100Hz – 200Hz) region while seamlessly integrating with other Broadway panel installations. Mounting is achieved using the included Primacoustic Corner Impalers. The Primacoustic Bass Trap kit is available in black, beige or grey fabric or in Absolute White[™] paintable finish. Sold in pairs.

SPECIFICATIONS:


ORDER NUMBER	Z840-1212-XX (xx denotes color code 00=Black; 03= Beige; 08=Grey; 09=White)			
DIMENSIONS	24" (610mm) x 48" (1219mm)			
PANEL DEPTH	2" (51mm)			
CORE MATERIAL DENSITY	Formed, semi-rigid inorganic glass fibers, 6.0 lbs pcf (96 kg/m3)			
WEIGHT	8.25 lbs / 3.8 kg per panel			
FACING	Acoustically transparent polyester or paintable glass wool tissue micromesh sealed with latex paint			
BACKING	Sealed with acoustically transparent micromesh			
EDGE TREATMENT	Sealed and hardened with resin			
RECYCLED CONTENT	Up to 40%			
LEED ELIGIBLE	Yes 🞯			

ABSORPTION CHARACTERISTICS:*

Sound absorption coefficient data

17" Corner Cavity	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	5kHz
Wall Panels0	.681	.201	.071	.001	.011	.001	.00
Paintable0	.511	.271	.111	.040	.96.	95	.95

* Testing performance based on Broadway panel test results and 1/4 wavelength calculations.

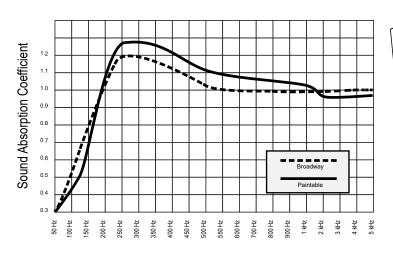





(432m

4::

1

...

KIT CONTAINS:

Panels™

24"x48"x2" (61cm x 122cm x 5cm) Full sized panels provide maximum absorption on larger wall surfaces. used with Corner Impalers™ to create effective corner traps where bass control is required.

Highly effective at all frequencies. Qty: 2

Corner Impaler™

Turn any room into bass traps by mounting a Broadway panel across a 90° corner to form a 17" (43.18cm) deep cavity that absorbs bass. Qty: 8

INSTALLING CORNER BASS TRAP PANELS

Prima corner impalers make it easy to mount the 24" x 48" Broadband panels across room corners to form effective bass traps. Like the surface impaling clips, the corner impalers feature sharp tips that penetrate the panel and hold it securely in place.

PANELS FIRE & BURN PERFORMANCE:

COUNTRY	TEST STANDARD	CLASSIFICATION
Canada	CAN/ULC-S102-03	Class A/1
USA	ASTM E84-09	Class A/1
Europe	EN 13501-1A	2-s1, d0
Australia / New Zealand	AS/NZS 1530.3	(I)0, (S)0, (H)0, (Sm)5

PAINTABLES FIRE & BURN PERFORMANCE:

COUNTRY	TEST STANDARD	CLASSIFICATION
Canada	CAN/ULC-S102-10	Class A/1
USA	ASTM E84-11bC	lass A/1
Europe	EN 13501-1B	-s2, d0
Australia / New Zealand	AS/NZS 1530.3	(I)0, (S)0, (H)0, (Sm)3