

## CEILING CLOUDS (CW)


### PRODUCT FEATURES

- Excellent sound absorption
- Fabric or painted finish
- Foil or finished backing available

### SOUND ABSORPTION – in Sabins

Hz	125	250	500	1000	2000	4000	NRC
SWC1	17.59	25.11	42.46	53.29	61.38	59.81	1.25

Note: NRC test results based on J-mounting with one Pinta cloud, 48" x 108". For test results with other finishes, contact your local Sales Rep or G&S Acoustics.

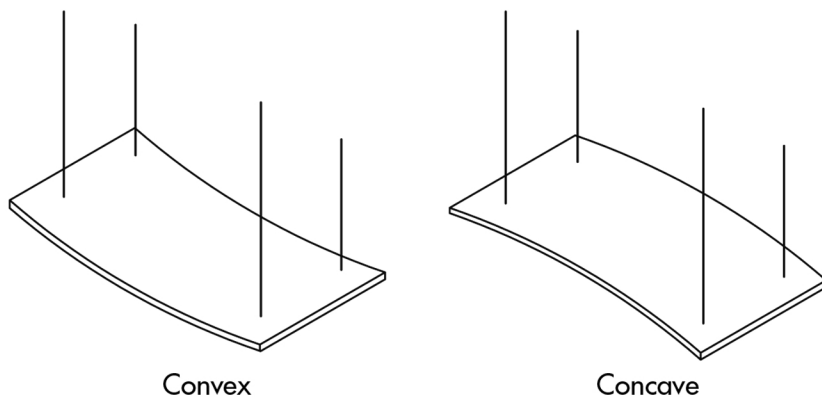

- Curved, independently-hung clouds
- Great design potential
- Custom shapes and sizes

### CORE

6 – 7 pcf fiberglass  
1" thick and 132" radius

### SIZES

Up to 4' x 8'

### MOUNTING

Swivel Cable Lock (cable by ALI Noise Control)

### FINISH

Fabric, paint (finished back optional)

### FLAMMABILITY

All components have a Class "A" rating per ASTM E84

Due to alignment, we recommend a minimum 12" reveal between clouds when Ceiling clouds are installed in groups.

Address: 2731 Vista Parkway # D-6 WPB, Florida 33411

Phone: 561-964-9360

Email: [info@allnoisecontrol.com](mailto:info@allnoisecontrol.com)