




B10LAG **Flexible Noise Barrier** **Spec Data Sheet**

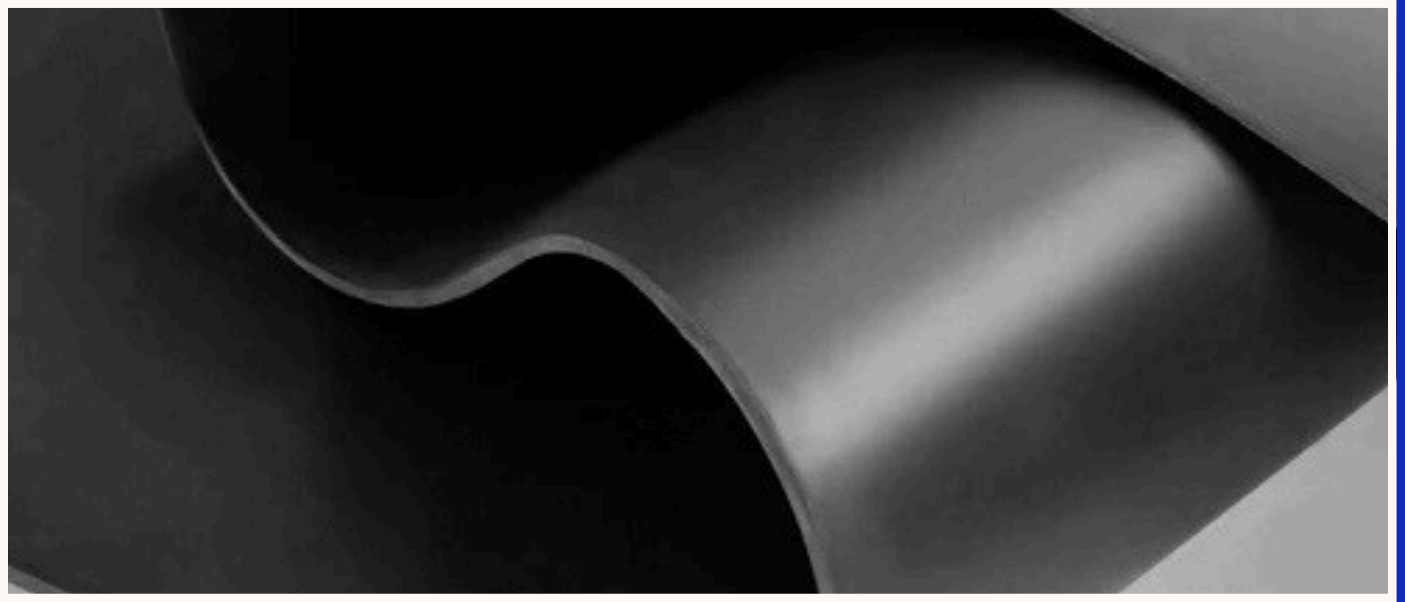

Acoustical Pipe and Duct Wrap

A flexible one-pound per square foot reinforced-foil faced load bearing vinyl noise barrier used to wrap noisy pipes, ducts, valves and fans housings.

- Standard roll sizes is 54" x 30' L
- Easy to cut, wrap and install with matching lag tape

Applications

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The reinforced foil exterior readily accepts a matching lag tape for easy installation. Also available with a 1" or 2" thick quilted fiberglass decoupler.

Product Data

Description : 1 lb. psf reinforced-foil faced loaded vinyl barrier.

Nominal Thickness: .090

Inches Standard Width: 54' Wide

Temperature Range: -10 TO + 220.F

Roll Length: 30 Feet

Weight: 1.0 LB. PSF

Flammability: UL 94: MEETS VO FMVSS 302: PASS

Acoustic Performance

| Octave Band Frequencies (HZ) | | | | | | | |
|------------------------------|-----|-----|-----|------|------|------|-----|
| Product | 125 | 250 | 500 | 1000 | 2000 | 4000 | STC |
| B10LAG | 15 | 18 | 22 | 27 | 32 | 37 | 27 |