

## SPEC DATA SHEET SQ-115


### ANC-4010 & ANC-4010B

### ACOUSTICAL CEILING TILES

ANC-ceiling grid panel are offered as both a sound absorbing as well as a combination sound absorbing / sound blocking tile.

ANC-4010 ceiling grid panel have a black matte facing attached to a 1" or 2" thick rigid fiberglass board and have excellent sound absorption (NRC) ratings.

ANC-4010B ceiling grid panel take the standard C-400 tile and add a 1# per square foot foil backed vinyl noise to the backside of the tile for high sound absorption (NRC) and high sound blocking (STC) requirements.

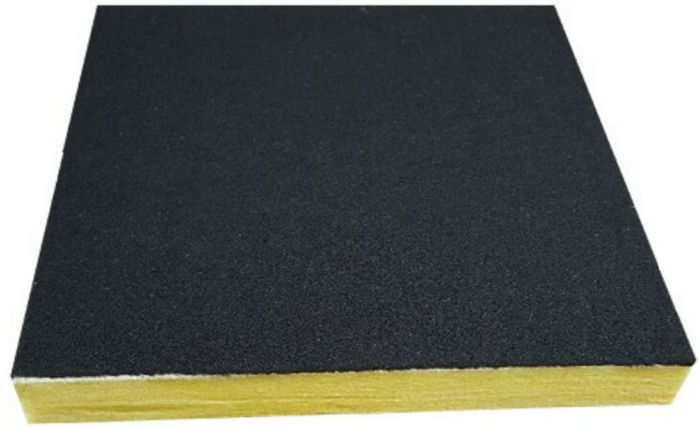

Substrate:	6-7# PCF rigid fiberglass core *C-400B adds a vinyl noise barrier
Mounting:	Grid supplied by others
Facing:	White or Black Poly Vinyl
Edge Detail:	Square
Finish:	Black matte facing

- Standard size 2' x 2' or 2' x 4'
- Custom sizes available
- 1" or 2" thickness
- Black matte facing
- Excellent acoustical values
- Offered with a vinyl noise barrier for high STC requirements

#### Acoustical NRC Rating:

1" Thick .85  
2" Thick 1.15  
C-400B Version STC 26

Weights	C-400 Tile .6 lbs / SqFt C-400B Tile 1.6 lbs / SqFt
Fire Rating:	All components have a Class A fire rating per ASTM E-84

#### Other Specifications:

Specifications can be downloaded from our website  
[www.soundseal.com](http://www.soundseal.com) or call us at 1.800.569.1294